

Designed as a dimensional alternative to the 1900G, Thermodyne's 1900DW offers additional space for side by side pan placement along with double doors for tight areas that require a narrow door swing. Using patented Fluid Shelf® technology, food quality and safety are a sure thing.



SPECIFICATIONS	
EXTERIOR DIMENSIONS	774.70W x 657.35D x 1905.00H
INTERIOR DIMENSIONS	673.10W x 571.50D x 1485.90H
MAX OPERATING TEMP	110°C
NET WEIGHT	203.66kg.
SHIPPING WEIGHT	253.86kg.

ELECTRICAL SPECIFICATIONS			
VOLTS	220	230	240
AMPS	27	28	29
TOTAL WATTS	5880	6370	7000
HERTZ	50	50	50
PHASE †	1	1	1
PLUG	BS4343 / 32A-6h		

† 3Ø Option, TD0003
 380V = 7.2 AMPS / 400V = 7.6 AMPS / 415V = 8 AMPS (CE)



SHELVES		
STANDARD	10	

CAPACITIES	STANDARD	MAXIMUM*
GASTRONORM PAN		
GN 1/1 65mm	20	28
GN 1/1 100mm	20	20

*Maximum capacities are based on additional shelving. Capacities vary depending on shelf quantities, spacing, and pan depth.

OPTIONS / ACCESSORIES	
Protective Bumper Base	Additional Heat Transfer Plates
Solid Back Panel	Stainless Steel Drip Pan

Specifications subject to change without notice.

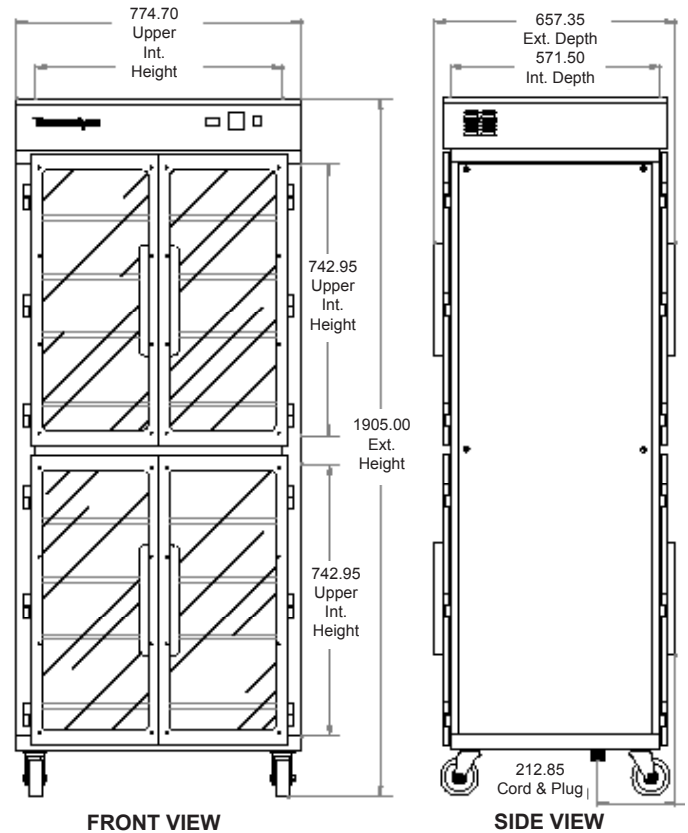

Patented REV. 11/15

