

Thermodyne's 1300G is the perfect answer to applications requiring on-site mobility. With standard heavy duty casters, cart handle and bumper guard protection, this unit is easily relocated from the kitchen to remote serving areas. Using patented Fluid Shelf® technology, food quality and safety are a sure thing.

SPECIFICATIONS				
EXTERIOR DIMENSIONS	660.40W	x	882.65D	x 1371.60H
INTERIOR DIMENSIONS	558.80W	x	701.80D	x 1028.70H
MAX OPERATING TEMP	110°C			
NET WEIGHT	135.62kg.			
SHIPPING WEIGHT	172.36kg.			

ELECTRICAL SPECIFICATIONS			
VOLTS	220	230	240
AMPS	11.0	12.0	13.0
TOTAL WATTS	2520	2755	3000
HERTZ	50	50.0	50.0
PHASE	1	1	1
PLUG	BS1363/A		




SHELVES	
STANDARD	6

CAPACITIES	STANDARD	MAXIMUM*
SHEET PAN		
18" x 26" x 1"	6	15
STEAM TABLE PAN		
12" x 20" x 2.5"	12	20
12" x 20" x 4"	12	14

*Maximum capacities are based on additional shelving. Capacities vary depending on shelf quantities, spacing, and pan depth.

OPTIONS / ACCESSORIES	
Protective Bumper Base	Additional Heat Transfer Plates
Controller Shield	Solid Stainless Steel Doors
Solid Back Panel	Stainless Steel Drip Pan

Specifications subject to change without notice.

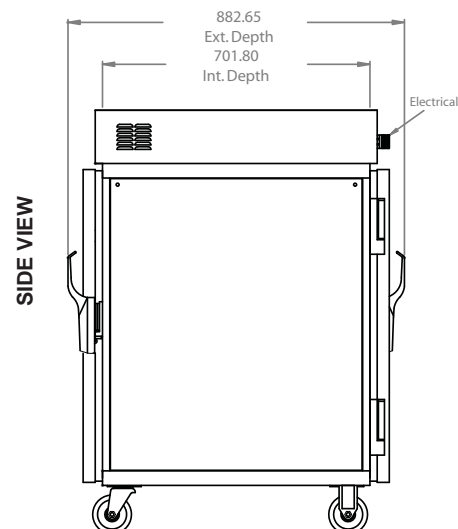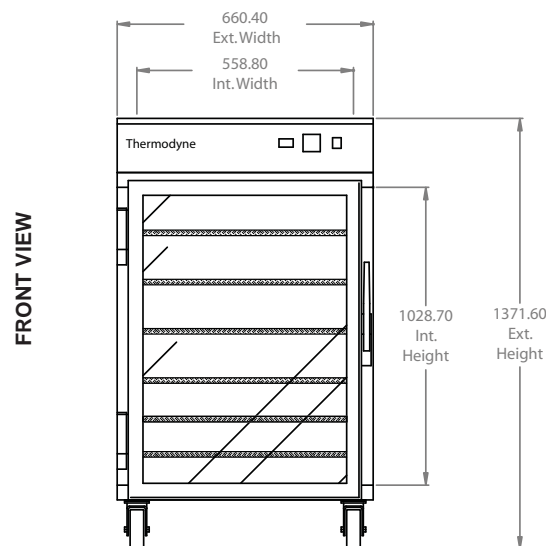

07/08 Patented

